


STANDARD FIBER DIRECT CONNECTIONS BETWEEN BBU & RRU

Breakout length 75 mm on one side and 275 mm on the other side. Single Mode A2 cables are used for optimized handling in the field.

SINGLE-MODE MODEL NUMBER

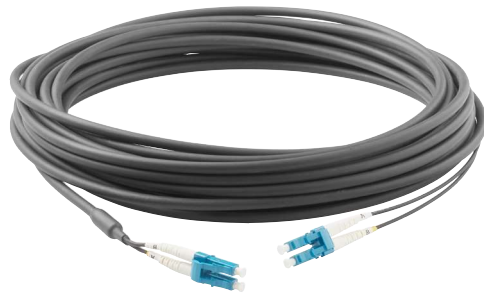

MODEL NUMBER	LENGTH m (ft)
FONF-LL01S-001M-09	1 (3.3)
FONF-LL01S-003M-09	3 (9.8)
FONF-LL01S-005M-09	5 (16.4)
FONF-LL01S-010M-09	10 (32.8)
FONF-LL01S-015M-09	15 (49.2)
FONF-LL01S-020M-09	20 (65.6)
FONF-LL01S-025M-09	25 (82.0)
FONF-LL01S-030M-09	30 (98.4)
FONF-LL01S-040M-09	40 (131.2)
FONF-LL01S-050M-09	50 (164.0)
FONF-LL01S-060M-09	60 (196.8)
FONF-LL01S-070M-09	70 (229.7)
FONF-LL01S-080M-09	80 (262.5)
FONF-LL01S-090M-09	90 (295.3)
FONF-LL01S-100M-09	100 (328.1)
FONF-LL01S-120M-09	120 (393.7)
FONF-LL01S-125M-09	125 (410.1)

