
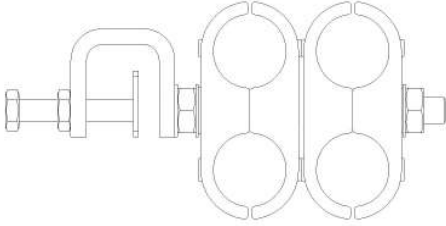
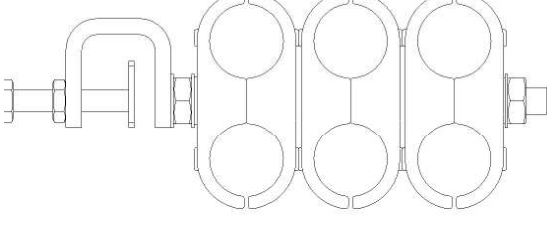


Part Number	L	Picture
DW2A1	80	
DW2A2	100	
DW2A3	130	

All dimensions are in mm; tolerances according to ISO 2768 c-H

Description

These double clamp assemblies are for the installation of multiple cable runs on towers. They are manufactured in high grade polypropylene and UV stabilised to prevent degradation or breaking.

Part number

DW2A-X

Cable Clamp for 1/2" (16mm) cables

X: number of cables

Technical Data Sheet



Double Cable Clamp Assembly

DW2A-X

Parts List

Number	Piece Parts	Material
1	Threaded rod M10xL	Stainless steel SS304
2	Nut M10	Stainless steel SS304
3	Spring Coil Washer M10	Stainless steel SS304
4	Flat Washer M10	Stainless steel SS304
5	Plastic Cable Clamp	Polypropylene
6	M10 MKD	Hot Dipped Galvanised Steel
7	Bolt M8x45	A4 304 Stainless Steel

Environmental Data

Temperature	-40°C to +85°C
Salt spray test	
UV resistance	
RoHS	Compliant

Packing

Standard 1 pce in a bag

Part Number	Weight / pce
DW2A1	300 g
DW2A2	350 g
DW2A3	400 g

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
L.Wesley	01/01/23	L.Wesley	01/01/23	001	001	S.W	01/01/23

GCA Ltd Ronell Place, 41A Shire Hill Industrial Estate, Saffron Walden, Essex, CB11 3AQ www.gca.co.uk	Tel – 01799 516016 Email – sales@gcald.co.uk	Page 2/2
----------------------------------------------------------------------------------------------------------------	-------------------------------------------------	-------------